


1 IR-200 Remote



2 IR-200 Remote - Learning Function

The learning function on the IR-200 remote is used to control your TV. You will be able to control: Power ON/OFF, Volume and Input Source. To do this you will need the factory remote control for your TV.

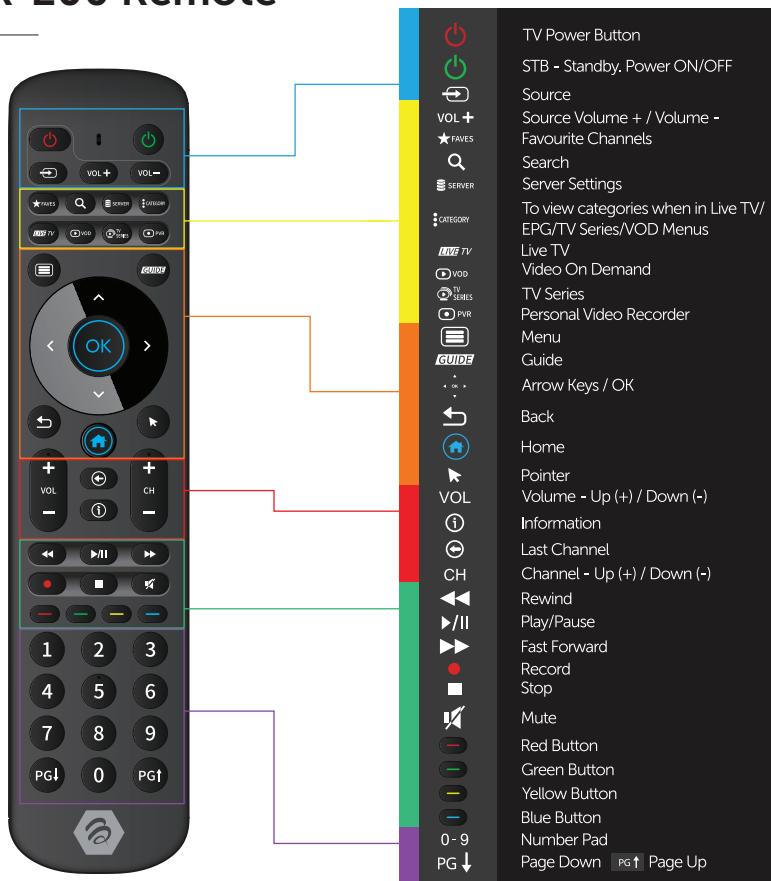

1. On the IR-200, press and hold the TV POWER + OK buttons for 3 seconds. Once the red light turns on, release the buttons.

2. Press the learning key you would like to program (TV POWER/SOURCE/ VOL+/ VOL-) and the red light will start flashing. The flashing red light indicates the IR-200 is in learning mode.



3. Align your TV Remote and the IR-200 so that the front transmitters are pointing at each other. They should be within 1 inch or 3 cm of each other.

4. Press the button that you want to learn on the original remote. After receiving a learning function successfully, the red light on the BT- 250 will blink 4 times.

5. To learn other keys, repeat Steps 2-4

6. After learning, long press the OK key for 3 seconds, and the red light will blink twice to save learning.

Note:

If you do not select the key within 15 seconds after entering the learning state, it will automatically exit the learning state.

Please note not all TVs are compatible with source pairing

CEC settings to support the IR-200, your TV & your BuzzTV Box

If you were successful in TV source pairing the IR-200 to your TV then you need to make sure the CEC settings on both the TV and your BuzzTV Box are enabled and in some cases in the correct HDMI port on the TV, refer to your TV manual if needed. (Initially set to ON)