

### **Package Contents**



XRS4500 XR4000








HDMI

### Connection

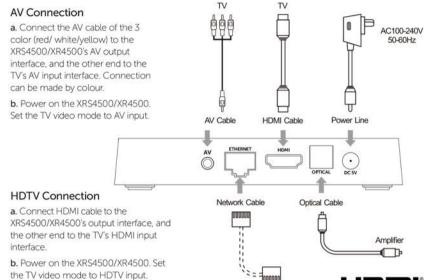

## **Installation Steps**

- 1. Connect XRS4500/XR4500 TV Box to the power supply.
- 2. Connect XRS4500/XR4500 to your TV with an HDMI Cable or AV Cable.
- 3. For a wired connection, plug-in an Ethernet cable from the TV Box to your modem or router. For wireless, choose your Wi-Fi network and input your Wi-Fi password.

# **Troubleshooting**

Warning: Under no circumstances should you try to repair the XR 4000 by yourself, as this will invalidate the warranty. Do not open it as there is a risk electrical shock. If any fault occurs, please first check with this troubleshooting checklist. If you are unable to remedy a problem by following this guide, contact your dealer for help.

Problem	Solution
No Power	Check if the power adapter is properly connected to the power and the TV box     Press the power on the remote controller to turn on the power
No Picture	Re-Connect the HDTV cable or AV cable     Check if the TV is powered on
No sound or distored sound	Adjust the volume     Check that the speakers are connected correctly
The TV box does not respond to the remote control	Aim the remote control directly at the sensor on thefront of the TV box Reduce the distance to the TV box Replace batteries in the remote control Possibility of system crash, disconnect and reconnect the power supply
No sound during playback	The audio codec may not be supported by the TV box Check the volume
The contents of the USB or flash drive cannot be read	The USB or flash drive format is not compatable with the box If one of the USB can not be read, please turn off the TV box for 30 seconds and restart the TV box  The USB or flash drive format is not compatable with the box.
Slow operation of the USB flash drive	<ul> <li>Large file size or high resolution USB flash drive takes longer time to read and display on the TV screen</li> </ul>
The TV screen is blank and the player LED is blinking	Turn off the TV box, wait 30 seconds and turn on again Check if HDTV connection is correct or try changing the HDTV cable

## Remote + Button List



#### Learning Remote Feature

Learning methods please see as below:

- 1. Long Press the "TV Power" + "Source" keys on the BT-100 RCU at the same time for 3 seconds until the Blue LED turns solid Blue. The RCU has now entered learning mode.
- 2. Press the key on the BT-100 RCU to be programmed, for example "TV Power" Key, the Blue LED will start blinking.
- 3. Aim the TV RCU that you want to learn from towards the front of this BT-100 RCU (Distance less than 3cm).

Press the button on the TV RCU that you want the BT-100 RCU remote to learn from. If the BT100 RCU is programmed correctly the Blue LED on the BT-100 \ RCU will blink 3 times then turn solid Blue.

This will indicate that you have programmed it properly.

- 4. Repeat Steps 2-3 for the "Source" button.
- 5. Short press "TV Power" key + "Source" key at the same time on the BT-100 RCU to exit learning remote.

# **Lights & Indicators**

Lighting on Front of XRS4500/XR4500 indicates the following:



Blue light - Unit is on



Red light - Unit is off

### Pairing BT100 Remote and XRS4500/XR4500

#### How to put RCU into Pairing Mode for BT

Press "OK" + "VOL - " for 3 seconds until Red LED "breathing on". RCU enters pairing mode. Device name is BuzzTV BT-100. You will need to have the STB searching for BT in order to fully pair the remote.

#### How to turn the Back lit Feature On/Off

Long press the blue button on the bottom right of the remote for 5+ seconds. This will turn the back lit feature on/off (illuminates for approximately 5 seconds when on).

## **Warranty Information**

For warranty information and registration, please visit:

www.buzztv.com/register

www.buzztv.com/support cs@buzztv.com